



Instruction Manual

1T-FC-677 3G-SDI Extender with HDMI Converter

Table of Contents

1.0	Introduction	2
2.0	Checking Package Contents	3
3.0	Specifications	4
4.0	Connecting the Hardware	5
5.0	Operating The Unit	5
6.0	Troubleshooting	6
7.0	Limited Warranty	7
8.0	Regulatory Compliance	8
9.0	Contact Information	8

1.0 INTRODUCTION

The 1T-FC-677 3G SDI Extender with HDMI Converter allows SD-SDI, HD-SDI and 3G-SDI signals to be displayed on either an SDI monitor or an HDMI capable monitor.

The high Bitrate processing of 2.970 Gbit/s ensures fast signal transmission without signal loss and also allows great flexibility in monitor selection since extremely high quality displays can be accomplished on either a high resolution SDI monitor or high resolution HDMI display. And, even greater utility is provided by the 3G loop through which allows both SDI and HDMI displays simultaneously.

Our professional video conversion products have been serving the industry for over twenty years. tvONE offers a full line of high quality Seamless Switchers, Video Scalers, Up/Down/Cross Converters, Analog-Digital Converters (SD/HD-SDI, HDMI, DVI), Format Converters, Standards Converters, TBC/Frame Synchronizers, Matrix Routing Switchers, Signal Distribution Amplifiers and Cat.5 Transmission Systems.

1.1 Liability Statement

Every effort has been made to ensure that this product is free of errors. tvONE cannot be held liable for the use of this hardware or any direct or indirect consequential damages arising from its use. It is the responsibility of the user of the hardware to check that it is suitable for his/her requirements and that it is installed correctly. All rights reserved. No parts of this manual may be reproduced or transmitted by any form or means electronic or mechanical, including photocopying, recording or by any information storage or retrieval system without the written consent of the publisher.

tvONE reserves the right to revise any of its hardware and software following its policy to modify and/or improve its products where necessary or desirable. This statement does not affect the legal rights of the user in any way.

All third party trademarks and copyrights are recognised. The tvONE logo, Magenta logo, CORIO word and the CORIO logo are registered trademarks of tvONE. All other trademarks are the property of their respective holders.

1.2 Features

The 1T-FC-677 3G-SDI Extender with HDMI Conversion has many features that enable it to perform in a superior manner. Among these features you will find:

- SD-SDI, HD-SDI and 3G-SDI to HDMI signal conversion
- Simultaneous display of 3G SDI and HDMI versions of the same signal
- Operation at 2.970Gb/s, 2.970/1.001Gb/s, 1.485Gb/s, 1.485/1.001Gb/s & 270Mb/s
- Supports SMPTE 425M (A & B), 424M, 292M and 259M-C
- Equalized and Re-clocked Loop Output
- Integrated 8-Channel 48Khz Audio De-Embedder
- Automatic Input Video Detection of SD-SDI, HD-SDI & 3G-SDI
- Conversion of SMPTE 425M level B to level A for 1080p 50/59.94/60 4:2:2 10 bit
- May cascade multiple units for maximum extender flexibility
- Allowable SDI transmission distances (using Belden 1694A cable) :
300 Meters for SD-SDI
200 Meters for HD-SDI
100 Meters for 3G SDI
- Locking +5VDC Connectors for enhanced mechanical security

2.0 CHECKING PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make certain the following items are contained in the shipping carton:

- 1x 3G-SDI Extender/HDMI Converter unit
- 1x Power Adapter
- 1x Operations Manual

NOTE: Please retain the original packing material should the need ever arise to return the unit. If you find any items are missing, contact your reseller or tvONE immediately. Have the Model Number, Serial Number and Invoice available for reference when you call.

3.0 SPECIFICATIONS:


Video Input	
SD-SDI, HD-SDI, 3G-SDI	1x via BNC Connector
Video Outputs	
3G-SDI HDMI	2x via BNC Connectors (Equalized & Re-clocked) 1x via HDMI Connector
De-Embedded Audio Outputs	
Stereo R+L	2x RCA Connectors
Video Signal Processing	
Input Signal Output signal SDI throughput Rates	Automatic Detection of Signal Type Equalized and Re-Clocked SDI Output 2.970Gb/s and 2.970/1.001Gb/s
Audio Processing	
De-Embedding	Up to 8-Channels, 48KHz (LPCM 2.0 or LPCM 7.1 over the HDMI output)
SMPTE Standards	
SMPTE I/O Supported	425M, Level A&B, 424M, 292M, 259M-C
Video Formats Supported	
SD and HD Formats	480i, 576i, 720p, 1080i, 3G-SDI 1080p
SDI Cable Distance (Using Belden 1694A)	
Max Distances	SD-SDI=300m, HD-SDI=200m, 3G-SDI=100m
Warranty	
Limited Warranty	3 Years Parts and Labor
Mechanical	
1T-FC-677 (H-W-D) 1T-FC-677 Weight	30 x 200 x 103.5mm (1.18 x 7.87 x 4.07") 585g (1.29 lbs.)
Environmental	
Operating Temperature Operating Humidity	0° to +40°C (+32° to +104°F) 20% to 90%, Non-condensing
Storage Temperature Storage Humidity	-10° to +60°C (+14° to +140°F) 20% to 90%, Non-condensing
Power Requirement	
External Power Supply	5VDC@2.6A, twist lock connector
Regulatory Approvals	
3G Extender Unit	FCC, CE, RoHS
Power Supply	UL, CUL, CE, PSE, GS, RoHS
Accessories Included	
1x AC Power Adapter	US, UK and Euro
1x Instruction Manual	

4.0 CONNECTING THE HARDWARE

Please study the panel drawings below and become familiar with the signal input, outputs, power requirements/inputs plus any controls present.

NOTE: The resolution capability of the remotely located display devices must be capable of displaying the output of the source device. Before connecting the 1T-FC-677, verify that the display device can support the output resolution.

4.1 1T-FC-677 Unit

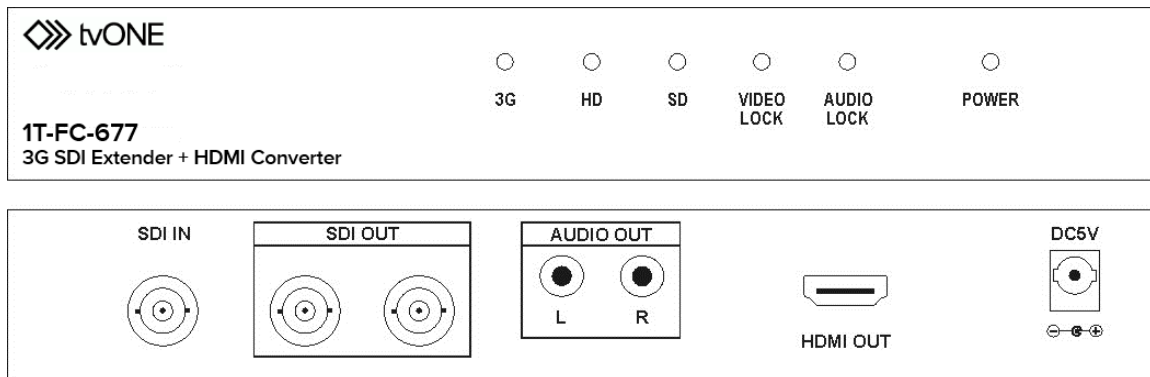

Connect the SDI source device's output to the SDI IN connector of the 1T-FC-677, using an appropriate high quality cable.

Connect an SDI cable or an HDMI cable to the appropriate OUTPUT connector. If you wish, you can also loop the 3G-SDI signal through the unit so that you can view both an SDI and an HDMI signal display at the same time.

Lastly, connect the AC adapter to the unit and observe that the Power LED is illuminated.

5.0 OPERATING THE UNIT

Once the connections have been made and power applied, there are no operational adjustments required. Equalization and Re-Clocking is performed automatically and the input type is also automatically determined by the 1T-FC-677.

SDI Audio channels are automatically detected (up to 8 channels) and are output over HDMI as either LPCM 2.0 or LPCM 7.1. If there are less than 8 active channels of audio, the 1T-FC-677 will automatically select the first 2 channels and output them over the analog stereo and HDMI outputs as LPCM 2.0. If there are 8 active channels, the first 2 channels will be output over the analog stereo outputs and the HDMI output will contain a full LPCM 7.1 audio signal. The SDI audio channels are assigned to the LPCM 7.1 channels as follows:

Channels 1 / 2 = Front Left / Front Right

Channels 3 / 4 = Center / LFE

Channels 5 / 6 = Surround Left / Surround Right

Channels 7 / 8 = Surround Back Left / Surround Back Right

In addition, LEDs will illuminate showing the status of the unit. The meanings of the LED display are as follows:

LED	Signal Status
Power	AC Adaptor is connected and providing power to unit
3G	Input type is 3G-SDI
HD	Input type is HD-SDI
SD	Input type is SD-SDI
Video Lock	Both input and outputs are present
Audio Lock	SDI signal has embedded audio and HDMI audio is active

6.0 TROUBLESHOOTING

Other than faulty cables or attempting to use the product over too great a distance, there are seldom problems with the 1T-FC-677.

If there is no image present at the remote location, connect the display device directly to the source to make certain that the problem is not in the display. If an image is present under those circumstances, make certain the unit is receiving power. Next make certain your cables are defect free and securely attached to the cable at each end.

Note: It is strongly recommended that you use premium cables in order to achieve maximum distance cable runs and the best performance possible.

After trying the above suggestions should the problem still persist, contact your dealer for additional suggestions before contacting tvONE. Should the dealer's technical personnel be unable to assist you, contact tvONE via our support website:

<http://tvone.crmdesk.com>. Create a technical support request on the site and our support team will respond within a short period of time.

7.0 LIMITED WARRANTY

tvONE warrants the original purchaser that the equipment it manufactures or sells will be free from defects in materials and workmanship for a fixed term from the date of purchase. The warranty term for specific product lines is defined below.

1. tvONE branded products based on tvONE's CORIO technology are warranted for a period of five years from the date of purchase. This includes products with the model number prefix of C2, 1T-C2, CX, A2 or S2.
2. tvONE products, other than those based on tvONE's CORIO technology mentioned above, are warranted for a period of three years from the date of purchase. This includes products with the model number prefix of 1T, with the exception of 1T-C2.
3. LCD Monitors are warranted for a period of three years from the date of purchase, with the exception of the LCD panels integrated into the monitors that are supplied by third parties. LCD panels are limited to the term and conditions of the warranty offered by the respective LCD panel manufacturer. Such specific LCD panel warranties are available upon request to tvONE.

Should a product, in tvONE's opinion, prove defective within this warranty period, tvONE, at its option, will repair or replace this product without charge. Any defective parts replaced become the property of tvONE. This warranty does not apply to those products which have been damaged due to accident, unauthorized alterations, improper repair, modifications, inadequate maintenance and care, or use in any manner for which the product was not originally intended.

If repairs are necessary under this warranty policy, the original purchaser must obtain a Return Authorization Number from tvONE and return the product to a location designated by tvONE, freight prepaid. After repairs are complete, the product will be returned, freight prepaid.

LIMITATIONS - All products sold are "as is" and the above Limited Warranty is in lieu of all other warranties for this product, expressed or implied, and is strictly limited to the stated number of years from the date of purchase. tvONE assumes no liability to distributors, resellers or end-users or any third parties for any loss of use, revenue or profit.

tvONE makes no other representation of warranty as to fitness for the purpose or merchantability or otherwise in respect of any of the products sold. The liability of tvONE with respect to any defective products will be limited to the repair or replacement of such products. In no event shall tvONE be responsible or liable for any damage arising from the use of such defective products whether such damages be direct, indirect, consequential or otherwise, and whether such damages are incurred by the reseller, end-user or any third party.

8.0 REGULATORY COMPLIANCE

The 1T-FC-677 3G-SDI Extender/HDMI Converter product has been tested for compliance with appropriate FCC and CE rules and regulations. The power adaptor/supply has been tested for compliance with appropriate UL, CUL, CE, PSE, GS Rules, regulations and/or guidelines. This product and power adapter is RoHS compliant.

9.0 CONTACT INFORMATION

Should you have questions or require assistance with this product in areas not covered by this manual, please contact tvONE at the appropriate location shown below.

tvONE USA

2791 Circleport Drive
Erlanger, KY 41018
USA
Tel 859-282-7303
Fax 859-282-8225
sales@tvone.com
www.tvone.com

tvONE Europe

Continental Approach
Westwood Industrial Estate
Margate, Kent CT9 4JG, UK
Tel +44 (0)1843 873311
Fax +44 (0)1843 873312
sales.europe@tvone.com

tvONE Latin America

6991 NW 82 Avenue #8
Miami, FL 33166
USA
Tel 305-396-6275
Fax 305-418-9306
sales.latinamerica@tvone.com

tvONE Mercosur

Av Diaz Velez 3965 PB
Capital Federal (1200)
Buenos Aires, Argentina
Tel +54 11 5917-2525
Fax +54 11 4032-0281
sales.mercosur@tvone.com

tvONE Asia

16F-4, No.75, Sec. 1
Xintai 5th Rd, Xizhi Dist
New Taipei City 22101
Taiwan R.O.C.
Tel +886 2 2698-2296
Fax +886 2 2698-2297
sales.asia@tvone.com

tvONE China

Rm. 1007 Golden Peach Building
No.1900 Shangcheng Road
Pudong, Shanghai
China 200120
Tel +86 21 5830-2960
Fax +86 21 5851-7949
sales.china@tvone.com

End of Manual